



INSTYTUT TECHNIKI BUDOWLANEJ
PL 00-611 WARSZAWA
ul. Filtrowa 1
tel.: (+48 22) 825-04-71
(+48 22) 579-62-94
eta@itb.pl
www.itb.pl



Member



www.eota.eu

European Technical Assessment

**ETA-12/0523
of 30/08/2022**

General Part

**Technical Assessment Body issuing the
European Technical Assessment**

Instytut Techniki Budowlanej

Trade name of the construction product

KOELNER

**Product family to which the construction
product belongs**

Three-dimensional nailing plates

Manufacturer

RAWLPLUG S.A.
ul. Kwidzyńska 6
51-416 Wrocław, Poland

Manufacturing plant

Manufacturing Plant no. 19

**This European Technical Assessment
contains**

36 pages including 2 Annexes which form an
integral part of this Assessment

**This European Technical Assessment is
issued in accordance with regulation (EU)
No 305/2011, on the basis of**

European Assessment Document
EAD 130186-00-0603 „Three-dimensional nailing
plates”

This version replaces

ETA-12/0523 issued on 28/09/2018

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

Specific Part

1 Technical description of the product

The three-dimensional nailing plates KOELNER are one-piece, non-welded elements (except D-TC nailing plate), made of galvanized steel sheet grade DX51D+Z275 according to EN 10346.

The range of the KOELNER three-dimensional nailing plates is given in Annex A. The characteristic material values, dimensions and tolerances of the three-dimensional nailing plates not indicated in that Annex shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment. The dimension tolerances shall meet the requirements of EN 22768-1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (EAD)

The KOELNER three-dimensional nailing plates are intended to be used for connecting the mutually perpendicular load-bearing solid timber elements, in side-grain to side grain configurations.

The timber structures shall be made of solid timber of strength class C24 or higher according to EN 338. Minimum dimensions of the elements have to be considered (Annex A).

Ring shank nails according to EN 14592 with the diameter of 4 mm and characteristic tensile capacity $F_{ax,Rk}$ not less than 1,77 kN shall be used for joints made with the KOELNER three-dimensional nailing plates.

The design of the joints shall be in accordance with EN 1993-1-1 (Eurocode 3) and EN 1995-1-1 (Eurocode 5).

The performances given in this European Technical Assessment are based on an assumed working life of the three-dimensional nailing plates of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

3.1.1 Joint strength

The characteristic load-carrying capacities of joints loaded according to static diagrams (see Annex B1 to B12), determined by tests, are given in Annex B.

3.1.2 Joint stiffness

No performance assessed.

3.1.3 Joint ductility

No performance assessed.

3.1.4 Resistance to seismic actions

No performance assessed.

3.1.5 Resistance to corrosion and deterioration

In respect of the requirements concerning corrosion resistance, KOELNER three-dimensional nailing plates made of galvanized steel sheet grade DX51D+Z275 according to EN 10346 are for use in timber structures subject to the internal conditions defined by service classes 1 and 2 according to EN 1995-1-1 (Eurocode 5).

3.2 Safety in case of fire (BWR 2)

3.2.1 Reaction to fire

The three dimensional nailing plates are classified as Class A1 of reaction to fire in accordance with EN 13501-1 and European Commission Decision 96/603/EC amended by European Commission Decision 2000/605/EC.

3.2.2 Resistance to fire

No performance assessed.

3.3 Methods used for the assessment

The assessment has been made in accordance with the EAD 130186-00-0603.

4 Assessment and verification of constancy of performance (AVPC) system applied, with reference to its legal base

According to Decision 97/638/EC of the European Commission the system 2+ of assessment and verification of constancy of performance applies (see Annex V to regulation (EU) No 305/2011).

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document (EAD)

Technical details necessary for the implementation of the AVCP system are laid down in the control plan which is deposited at Instytut Techniki Budowlanej.

For type testing the results of the tests performed as part of the assessment for the European Technical Assessment shall be used unless there are changes in the production line or plant. In such cases the necessary type testing has to be agreed between Instytut Techniki Budowlanej and the notified body.

Issued in Warsaw on 30/08/2022 by Instytut Techniki Budowlanej



Anna Panek, MSc
Deputy Director of ITB

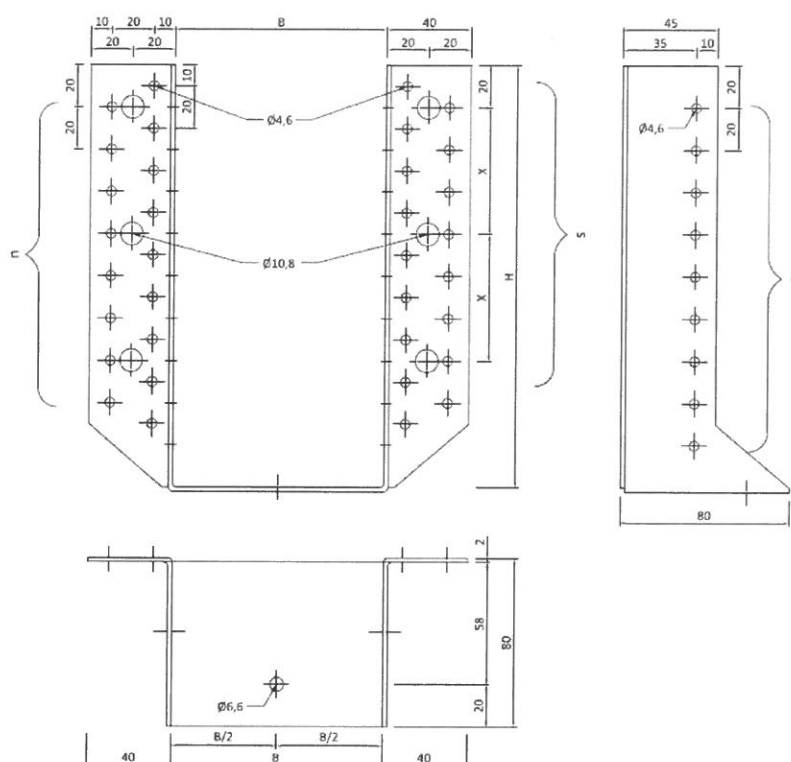


Table A1. KOELNER D-WB three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness, mm	Number of holes in row n	Number of holes ϕ 4,6	Dimension X, mm	Number of holes ϕ 10,8 s
	B, mm	H, mm					
D-WB-411	40	110	2,0	4	$2 \times 7 + 2 \times 4$	—	2×1
D-WB-510	50	105		4	$2 \times 7 + 2 \times 4$	—	2×1
D-WB-516	50	165		7	$2 \times 13 + 2 \times 7$	2×50	2×3
D-WB-610	60	100		4	$2 \times 7 + 2 \times 4$	—	2×1
D-WB-613	60	130		5	$2 \times 9 + 2 \times 5$	1×50	2×2
D-WB-712	70	125		5	$2 \times 9 + 2 \times 5$	1×50	2×2
D-WB-812	80	120		5	$2 \times 9 + 2 \times 5$	1×50	2×2
D-WB-815	80	150		6	$2 \times 11 + 2 \times 6$	1×60	2×2
D-WB-818	80	180		8	$2 \times 15 + 2 \times 8$	2×60	2×3
D-WB-914	90	145		6	$2 \times 11 + 2 \times 6$	2×60	2×2
D-WB-1014	100	140		6	$2 \times 11 + 2 \times 5$	1×60	2×2
D-WB-1020	100	200		9	$2 \times 17 + 2 \times 9$	2×60	2×3

KOELNER

Three-dimensional nailing plates KOELNER D-WB

Annex A1
of European
Technical Assessment
ETA-12/0523

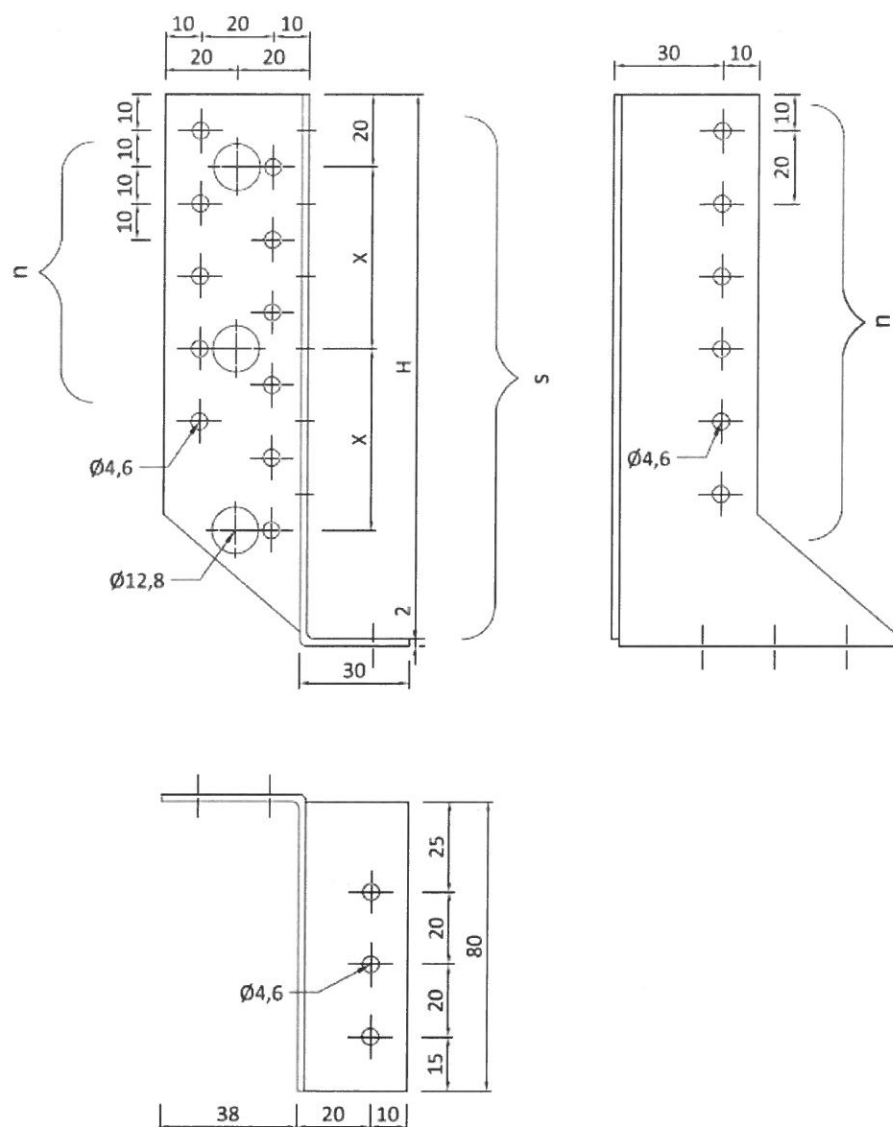


Table A2. KOELNER D-WD three-dimensional nailing plate symbols and dimensions

Symbol	Dimension H, mm	Thickness, mm	Number of holes ϕ 4,6 n	Dimension X, mm	Number of holes ϕ 12,8 s
D-WD-310	100	2,0	7 + 4	—	1
D-WD-312	120		9 + 5	1 × 50	2
D-WD-315	105		11 + 6	2 × 60	3

KOELNER	Annex A2 of European Technical Assessment ETA-12/0523
Three-dimensional nailing plates KOELNER D-WD	

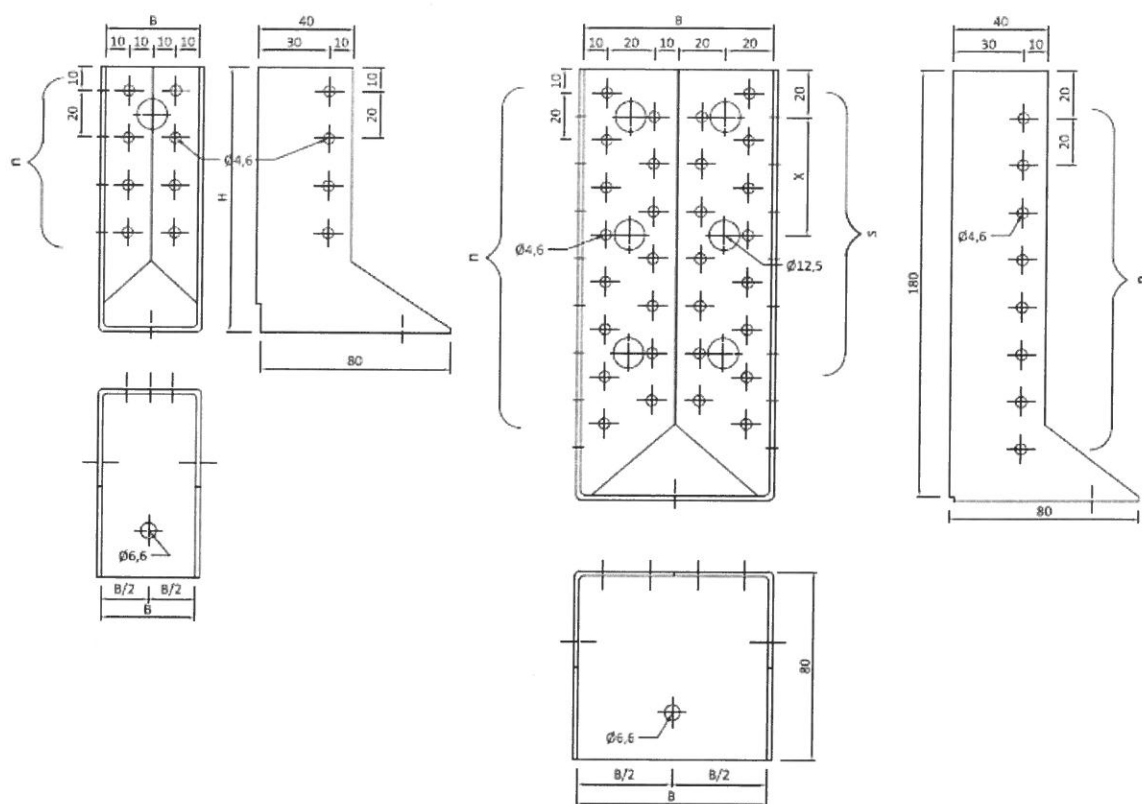


Table A3. KOELNER D-WC three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness, mm	Number of holes $\phi 4,6$ n	Dimension X, mm	Number of holes $\phi 12,8$ s
	B, mm	H, mm				
D-WC-411	40	110	2,0	$2 \times 4 + 2 \times 4$	—	—
D-WC-510	50	105		$2 \times 4 + 2 \times 4$	—	—
D-WC-610	60	100		$2 \times 4 + 2 \times 4$	—	—
D-WC-712	70	125		$2 \times 5 + 2 \times 5$	—	—
D-WC-812	80	120		$2 \times 9 + 2 \times 5$	1×50	2×2
D-WC-815	80	150		$2 \times 11 + 2 \times 6$	1×60	2×2
D-WC-818	80	180		$2 \times 15 + 2 \times 8$	2×50	2×3
D-WC-914	90	145		$2 \times 11 + 2 \times 6$	1×60	2×2
D-WC-1014	100	140		$2 \times 11 + 2 \times 5$	1×60	2×2

KOELNER

Three-dimensional nailing plates KOELNER D-WC

Annex A3
of European
Technical Assessment
ETA-12/0523

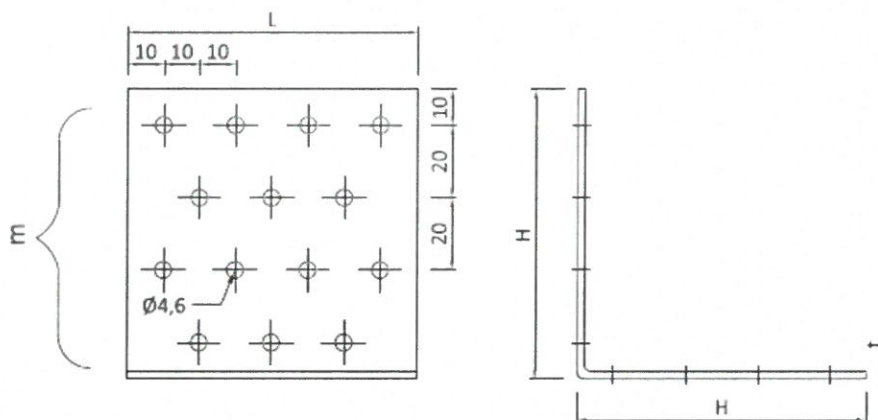


Table A4. KOELNER D-KF and D-KP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness t, mm	Number of row, m	Number of holes ϕ 4,6 n
	H x H, mm	L, mm			
D-KF-444	40 x 40	40	2,0	2	2 x 3
D-KF-446	40 x 40	60		2	2 x 5
D-KF-448	40 x 40	80		2	2 x 7
D-KF-4410	40 x 40	100		2	2 x 9
D-KF-4415	40 x 40	150		2	2 x 15
D-KF-664	60 x 60	40		3	2 x 5
D-KF-665	60 x 60	50		3	2 x 8
D-KF-666	60 x 60	60		3	2 x 8
D-KF-668	60 x 60	80		3	2 x 11
D-KF-884	80 x 80	40		4	2 x 6
D-KF-886	80 x 80	60		4	2 x 10
D-KF-888	80 x 80	80		4	2 x 14
D-KF-114	100 x 100	40		5	2 x 8
D-KF-116	100 x 100	60		5	2 x 13
D-KF-118	100 x 100	80		5	2 x 18
D-KF-1110	100 x 100	100		5	2 x 23
D-KF-1112	100 x 100	120		5	2 x 28
D-KF-1114	100 x 100	140		5	2 x 33
D-KP-444	40 x 40	40	2,5	2	2 x 3
D-KP-446	40 x 40	60		2	2 x 5
D-KP-448	40 x 40	80		2	2 x 7
D-KP-4410	40 x 40	100		2	2 x 9
D-KP-4415	40 x 40	150		2	2 x 15
D-KP-664	60 x 60	40		3	2 x 5
D-KP-665	60 x 60	50		3	2 x 8
D-KP-666	60 x 60	60		3	2 x 8
D-KP-668	60 x 60	80		3	2 x 11
D-KP-6610	60 x 60	100		3	2 x 14
D-KP-884	80 x 80	40		4	2 x 6
D-KP-886	80 x 80	60		4	2 x 10
D-KP-888	80 x 80	80		4	2 x 14
D-KP-8810	80 x 80	100		4	2 x 18
D-KP-8812	80 x 80	120		4	2 x 22
D-KP-114	100 x 100	40		5	2 x 8
D-KP-116	100 x 100	60		5	2 x 13
D-KP-118	100 x 100	80		5	2 x 18
D-KP-1110	100 x 100	100		5	2 x 23
D-KP-1112	100 x 100	120		5	2 x 28
D-KP-1114	100 x 100	140		5	2 x 33

KOELNER

Three-dimensional nailing plates KOELNER D-KF and D-KP

Annex A4
of European
Technical Assessment
ETA-12/0523

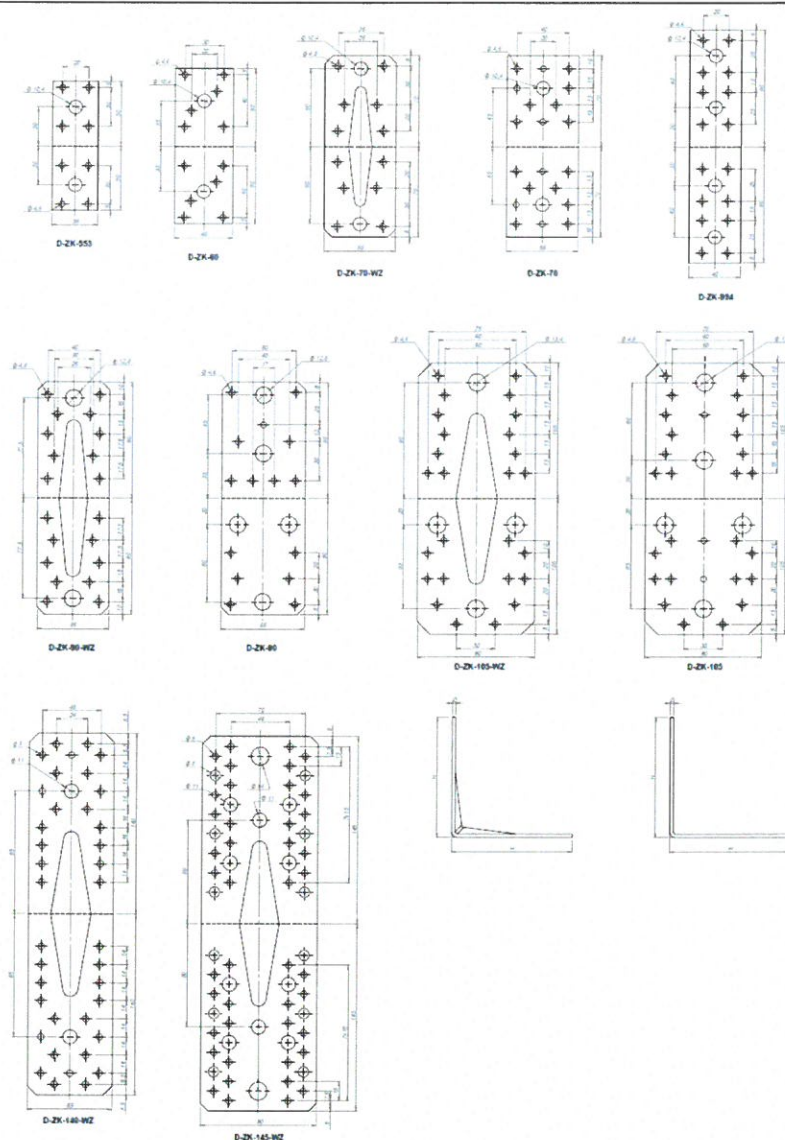


Table A5. KOELNER D-ZK three-dimensional nailing plate symbols and dimensions

Symbol	H x H, mm	G, mm	Number of holes							
			Ø4,6	Ø5	Ø8	Ø10,4	Ø11	Ø12,8	Ø13,4	Ø14
D-ZK-553	50 x 50	2,5	4+4	-	-	1+1	-	-	-	-
D-ZK-70	70 x 70		10+10	-	-	1+1	-	-	-	-
D-ZK-90	90 x 90		9+6	-	-	-	-	2+3	-	-
D-ZK-60	60 x 60		6+6	-	-	1+1	-	-	-	-
D-ZK-994	90 x 90		8+8	-	-	2+2	-	-	-	-
D-ZK-105	105 x 105		15+14	-	-	-	-	-	2+3	-
D-ZK-70-WZ	70 x 70		6+6	-	-	1+1	-	-	-	-
D-ZK-90-WZ	90 x 90		10+10	-	-	-	1+1	1+1	-	-
D-ZK-140-WZ	140 x 140		-	19 + 19	-	-	-	-	-	-
D-ZK-145-WZ	145 x 145		-	22 + 22	6 + 6	-	-	-	-	1+1
D-ZK-105-WZ	105 x 105		14+12	-	-	-	-	-	1+3	-

KOELNER

Three-dimensional nailing plates KOELNER D-ZK

Annex A5
of European
Technical Assessment
ETA-12/0523

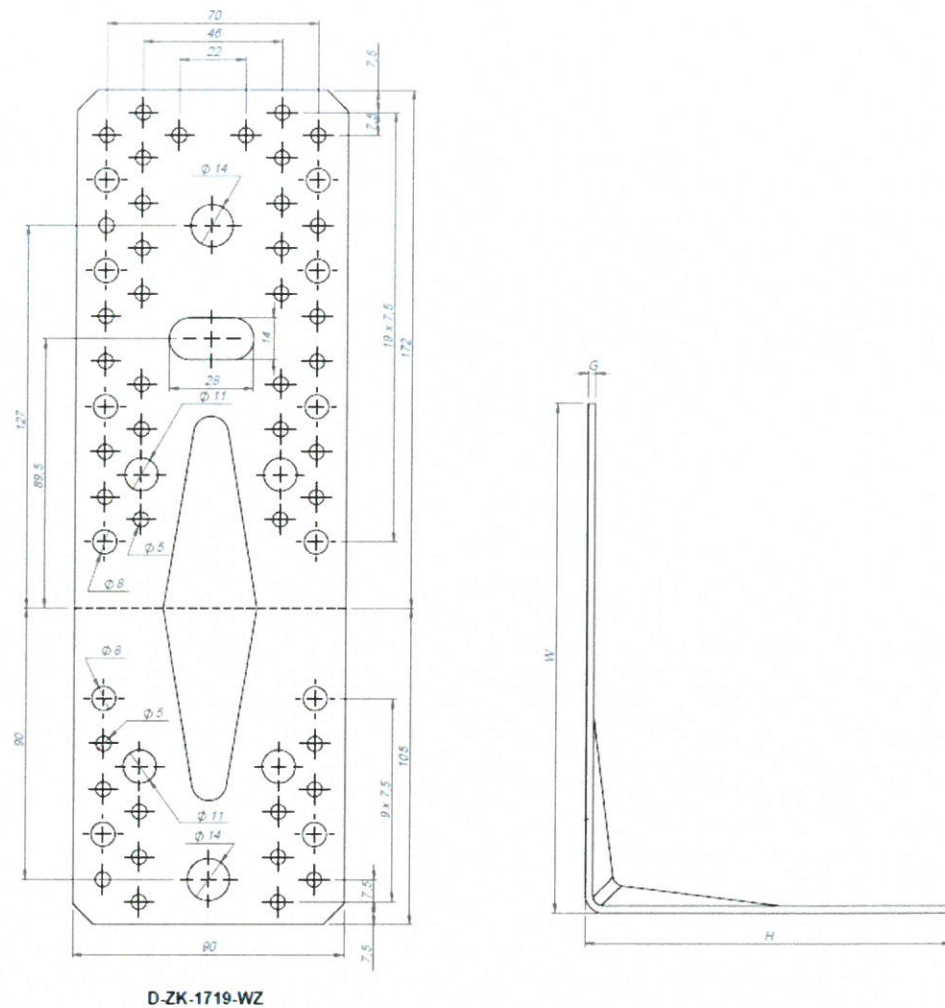


Table A6. KOELNER D-ZK three-dimensional nailing plate symbols and dimensions

Symbol	H x H, mm	G, mm	Number of holes			
			Ø5	Ø8	Ø11	Ø14
D-ZK-1719-WZ	105 x 172	3,0	28 + 12	8 + 4	2+2	1+1

KOELNER	Annex A6 of European Technical Assessment ETA-12/0523
Three-dimensional nailing plates KOELNER D-ZK	

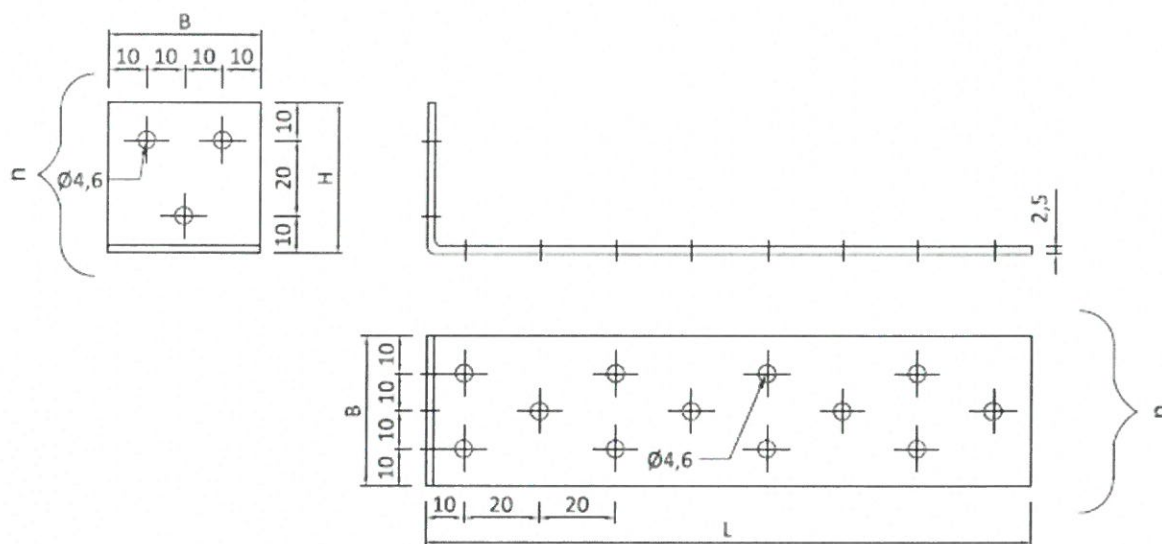


Table A7. KOELNER D-ZN three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions			Thickness, mm	Number of holes, Ø 4,6
	H, mm	L, mm	B, mm		
D-ZN-4164	40	160	40	2,5	3 + 12
D-ZN-4124	40	120	40		3 + 9
D-ZN-4904	40	90	40		3 + 9
D-ZN-5905	50	90	50		5 + 10
D-ZN-6356	60	35	60		8 + 8
D-ZN-6906	60	90	60		8 + 12
D-ZN-8604	80	60	40		6 + 5
D-ZN-9124	90	120	40		8 + 9

KOELNER

Three-dimensional nailing plates KOELNER D-ZN

Annex A7
of European
Technical Assessment
ETA-12/0523

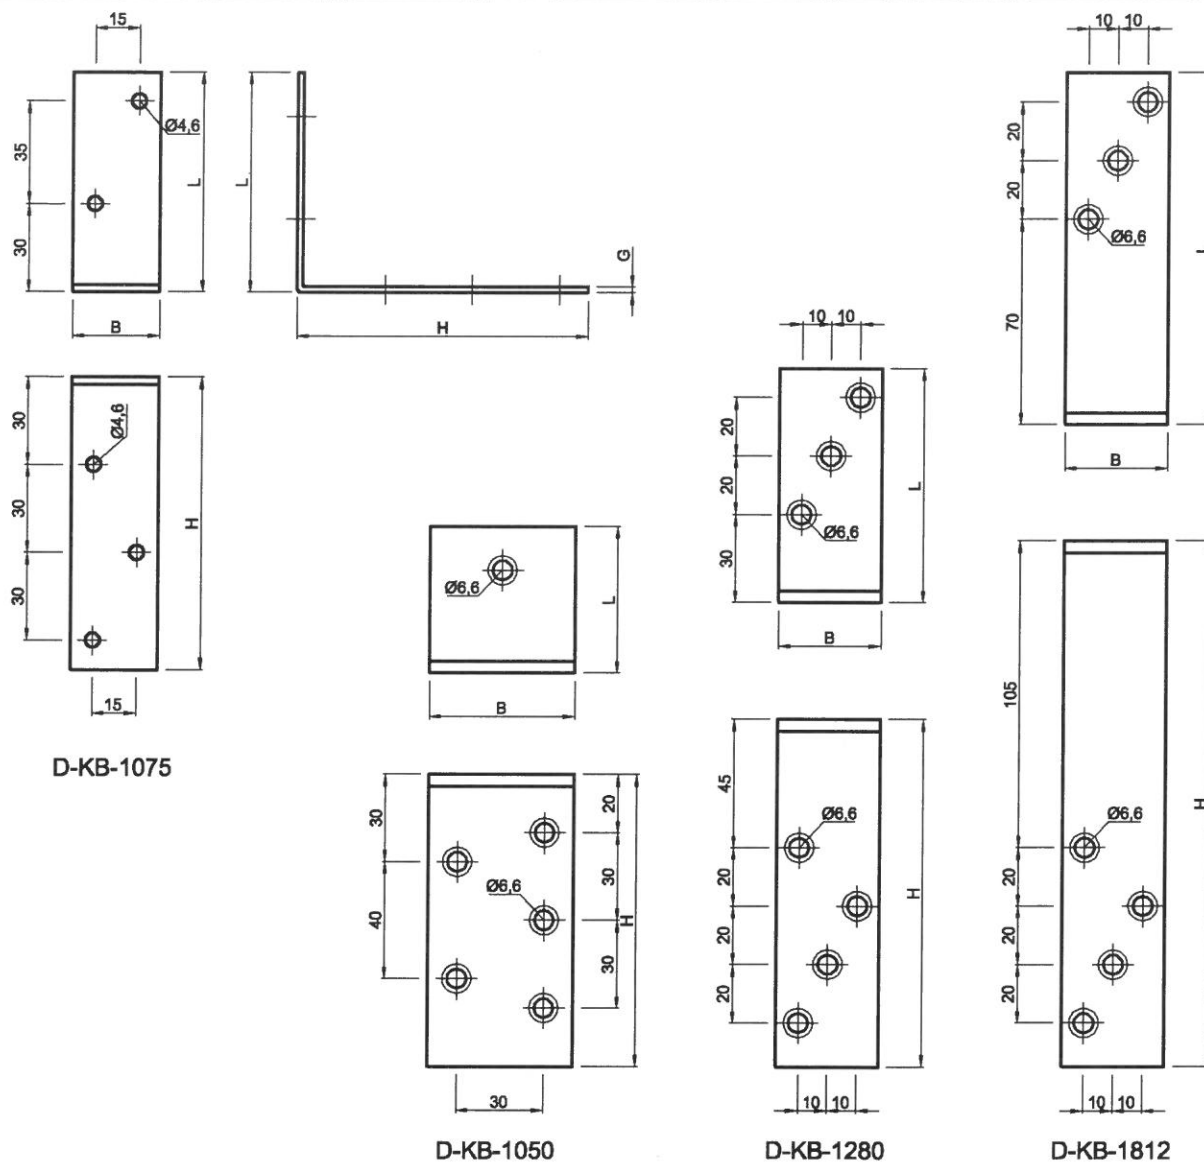



Table A8. KOELNER D-KB three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions H × B × L, mm	Thickness, mm	Number of holes φ 4,6	Number of holes φ 6,6
D-KB-1075	100 × 75 × 30	2,5	3 + 2	—
D-KB-1050	100 × 50 × 50	4,0	—	5 + 1
D-KB-1280	120 × 80 × 35		—	4 + 3
D-KB-1812	180 × 120 × 40	5,0	—	4 + 3


KOELNER

Three-dimensional nailing plates KOELNER D-KB


Annex A8
of European
Technical Assessment
ETA-12/0523




D-MI-2215



D-MI-3315



D-MI-4415



D-MI-5515

Table A9. KOELNER D-MI three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness, mm	Number of holes ϕ 4,6
	H x H, mm	L, mm		
D-MI-2215	25 x 25	15	2,0	2 x 2
D-MI-3315	30 x 30			
D-MI-4415	40 x 40			
D-MI-5515	50 x 50			

KOELNER

Three-dimensional nailing plates KOELNER D-MI

Annex A9
of European
Technical Assessment
ETA-12/0523

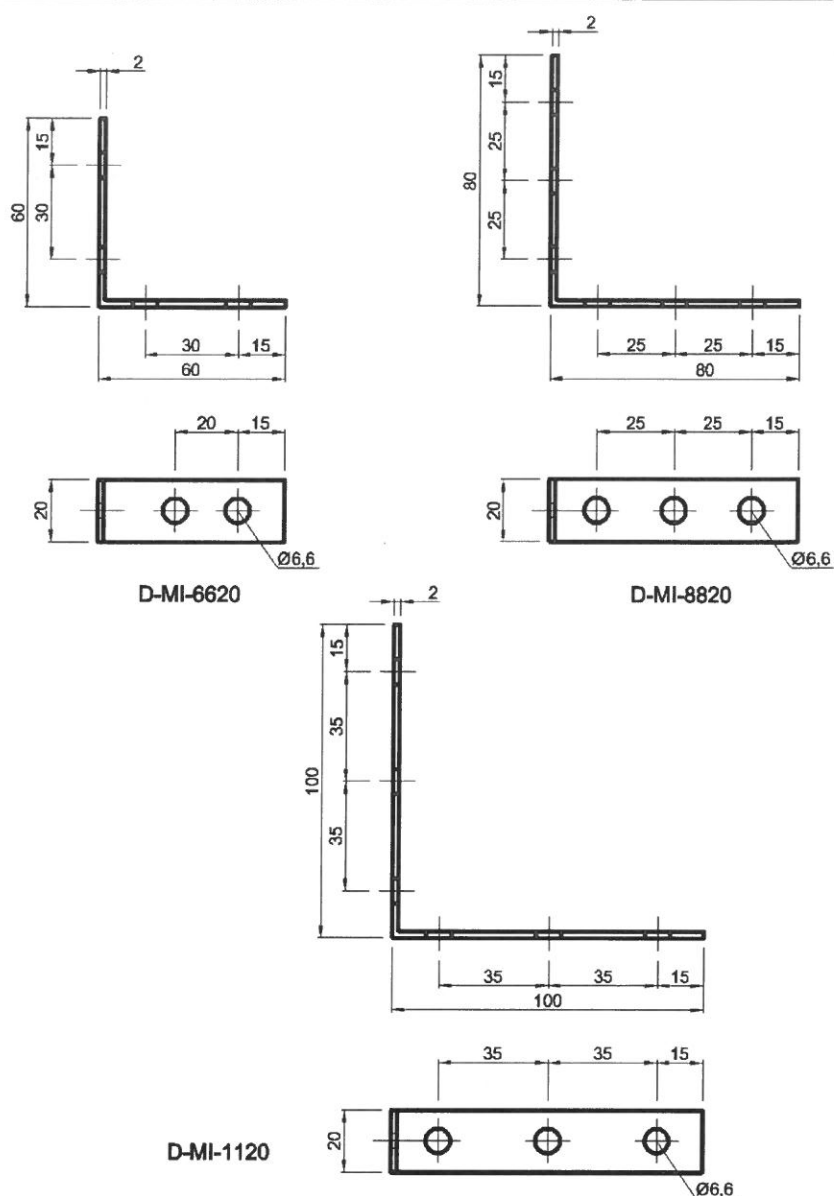


Table A10. KOELNER D-MI three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness, mm	Number of holes $\phi 6,6$
	H x H, mm	L, mm		
D-MI-6620	60 x 60	20	2,0	2 x 2
D-MI-8820	80 x 80			2 x 3
D-MI-1120	100 x 1000			

KOELNER

Three-dimensional nailing plates KOELNER D-MI

Annex A10
of European
Technical Assessment
ETA-12/0523

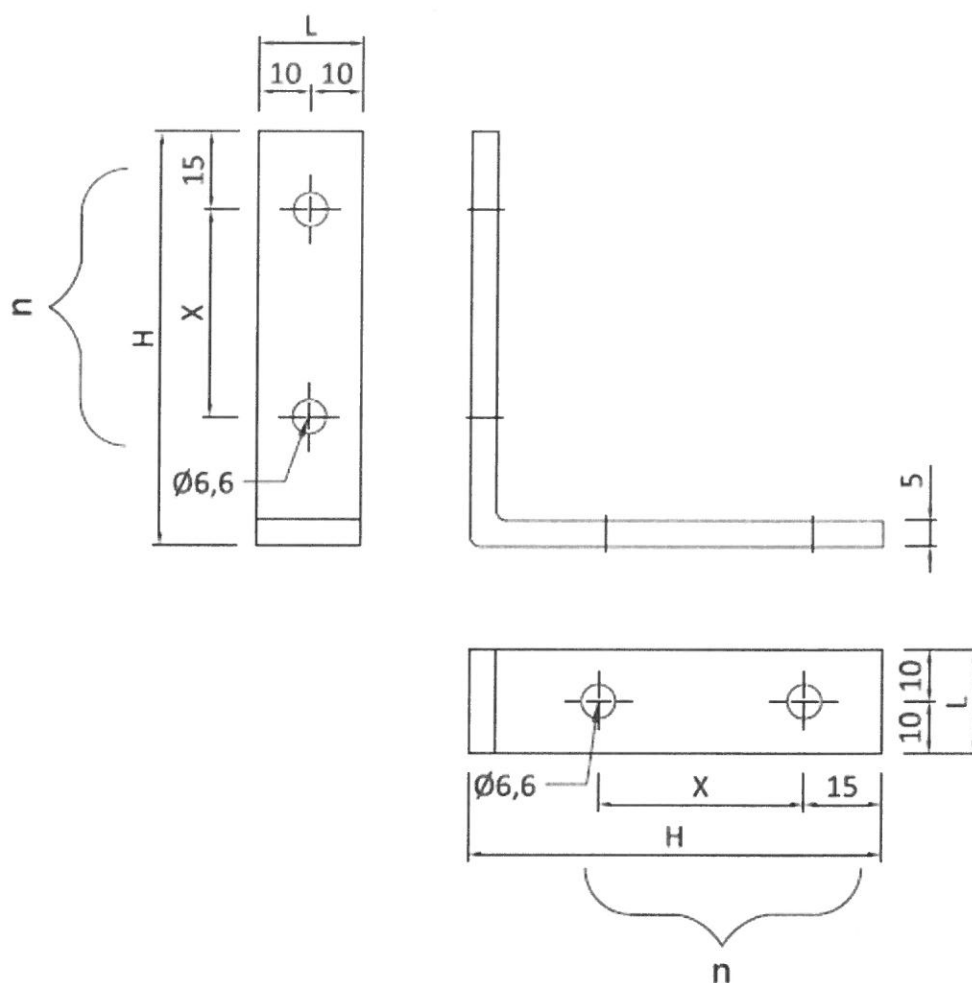


Table A11. KOELNER D-MK three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness, mm	Number of holes ϕ 6,6 n	Dimension X, mm
	H $\times$ H, mm	L, mm			
D-MK-085	80 $\times$ 80	20	5,0	2 $\times$ 2	1 $\times$ 40
D-MK-105	100 $\times$ 100				1 $\times$ 50
D-MK-125	120 $\times$ 120				1 $\times$ 70
D-MK-145	140 $\times$ 140			2 $\times$ 3	2 $\times$ 50
D-MK165	160 $\times$ 160				2 $\times$ 60
D-MK-185	180 $\times$ 180				2 $\times$ 65

KOELNER

Three-dimensional nailing plates KOELNER D-MK

Annex A11
of European
Technical Assessment
ETA-12/0523

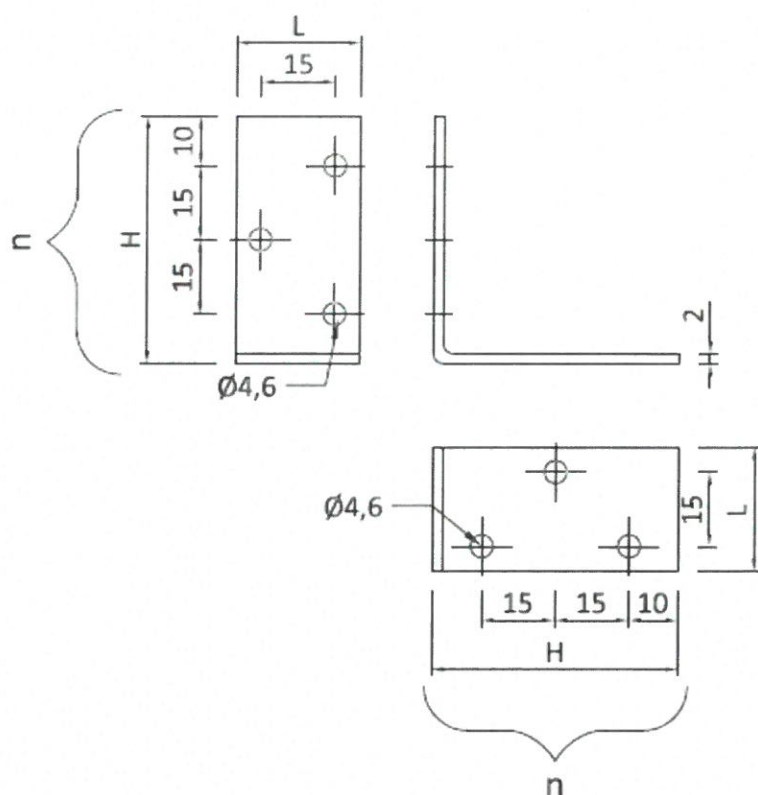


Table A12. KOELNER D-ZU three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		Thickness, mm	Number of holes ϕ 4,6 n
	H × H, mm	L, mm		
D-ZU-3325	30 × 30	25	2,0	2 + 2
D-ZU-4425	40 × 40			
D-ZU-5525	50 × 50			
D-ZU-6625	60 × 60			
D-ZU-5530	50 × 50	30		3 + 3
D-ZU-5730	50 × 70			3 + 4

KOELNER

Three-dimensional nailing plates KOELNER D-ZU

Annex A12
of European
Technical Assessment
ETA-12/0523

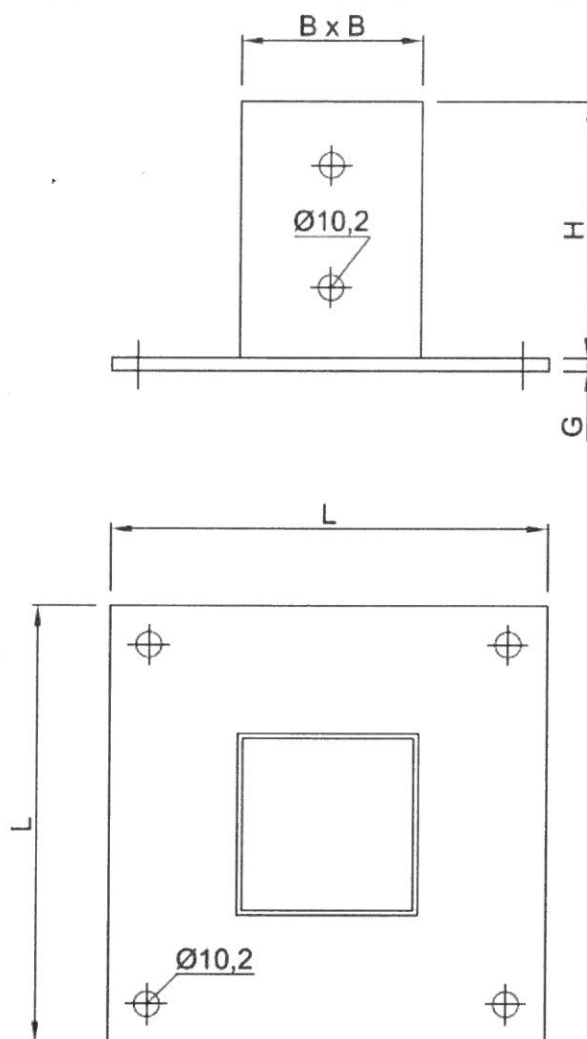


Table A13. KOELNER D-TB three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		
	B x B x H, mm	L x L, mm	G, mm
D-TB-71	71 x 71 x 150	150 x 150	2
D-TB-81	81 x 81 x 150	150 x 150	2
D-TB-91	91 x 91 x 150	150 x 150	2
D-TB-101	101 x 101 x 170	150 x 150	2
D-TB-121	121 x 121 x 170	150 x 150	2

KOELNER

Three-dimensional nailing plates KOELNER D-TB

Annex A13
of European
Technical Assessment
ETA-12/0523

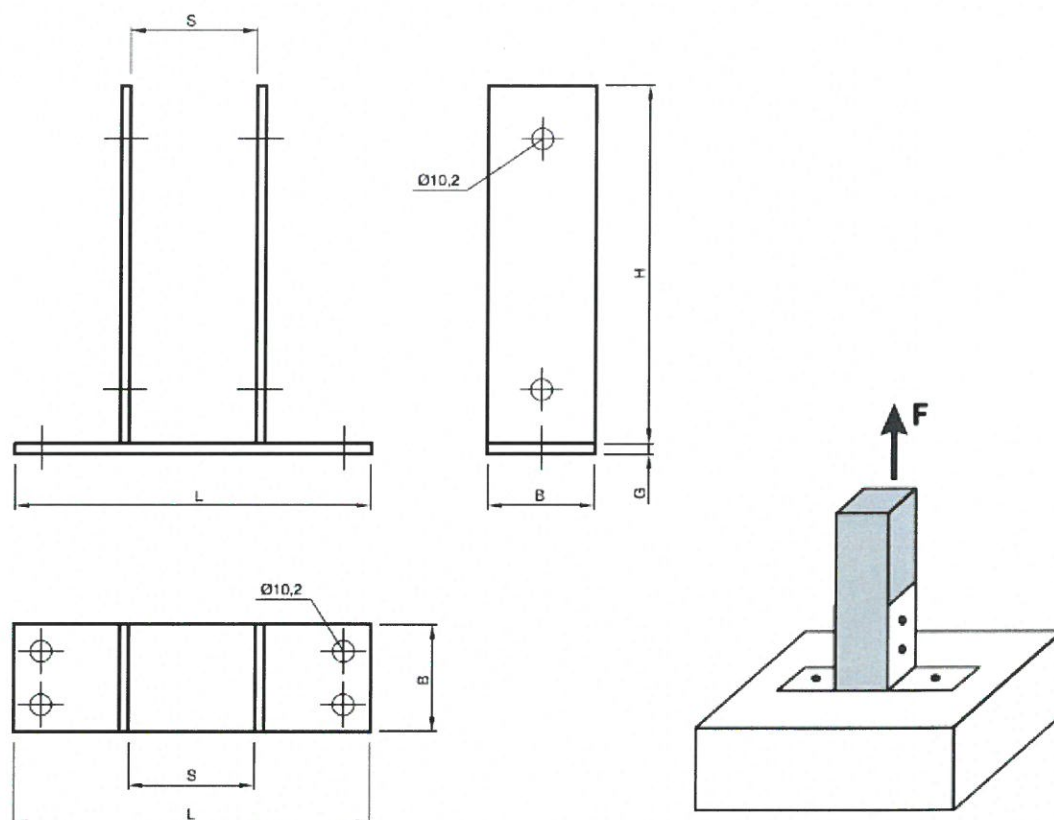


Table A14. KOELNER D-TG three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions	
	L x B x H, mm	S, mm
D-TG-716	200 x 60 x 200	71
D-TG-816	200 x 60 x 200	81
D-TG-916	200 x 60 x 200	91
D-TG-1016	200 x 60 x 200	101
D-TG-1116	200 x 60 x 200	111
D-TG-1216	200 x 60 x 200	121

KOELNER

Three-dimensional nailing plates KOELNER D-TG

Annex A14
of European
Technical Assessment
ETA-12/0523

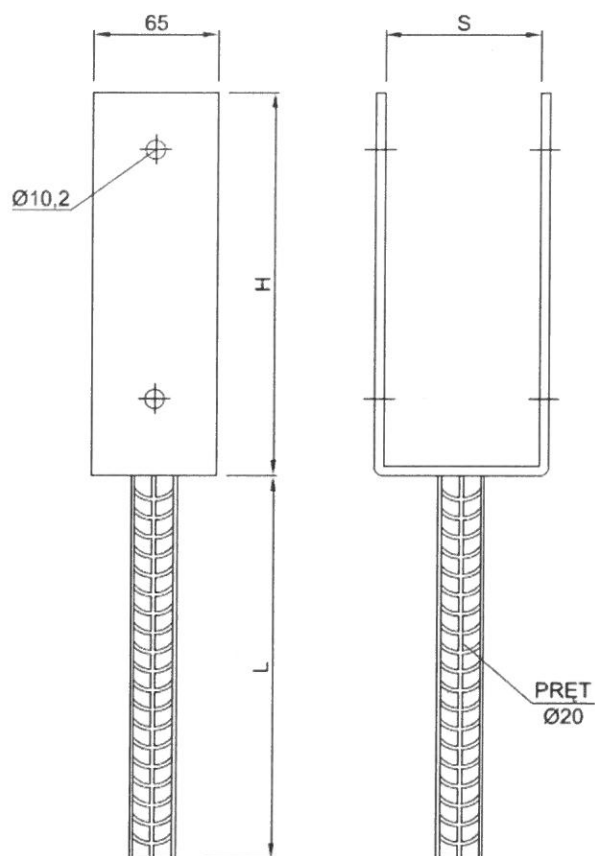


Table A15. KOELNER D-TC three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions		
	H, mm	L, mm	S, mm
D-TC-716	100	200	71
D-TC-816			81
D-TC-916			91
D-TC-1016			101
D-TC-1116			111
D-TC-1216			121
D-TC-1416			141
D-TC-1616			161

KOELNER

Three-dimensional nailing plates KOELNER D-TC

Annex A15
of European
Technical Assessment
ETA-12/0523

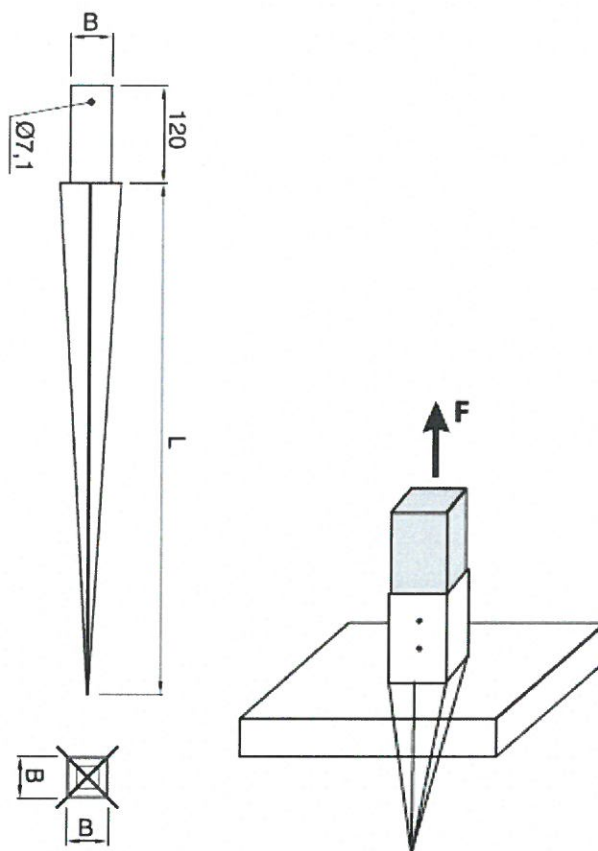


Table A16. KOELNER D-TD three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions
	B x B x L, mm
D-TD-5175	50 x 50 x 750
D-TD-7160	70 x 70 x 600
D-TD-7175	70 x 70 x 750
D-TD-7190	70 x 70 x 900
D-TD-9160	90 x 90 x 600
D-TD-9175	90 x 90 x 750
D-TD-9190	90 x 90 x 900
D-TD-1075	100 x 100 x 750
D-TD-1090	100 x 100 x 900
D-TD-1290	120 x 120 x 900

KOELNER

Three-dimensional nailing plates KOELNER D-TD

Annex A16
of European
Technical Assessment
ETA-12/0523

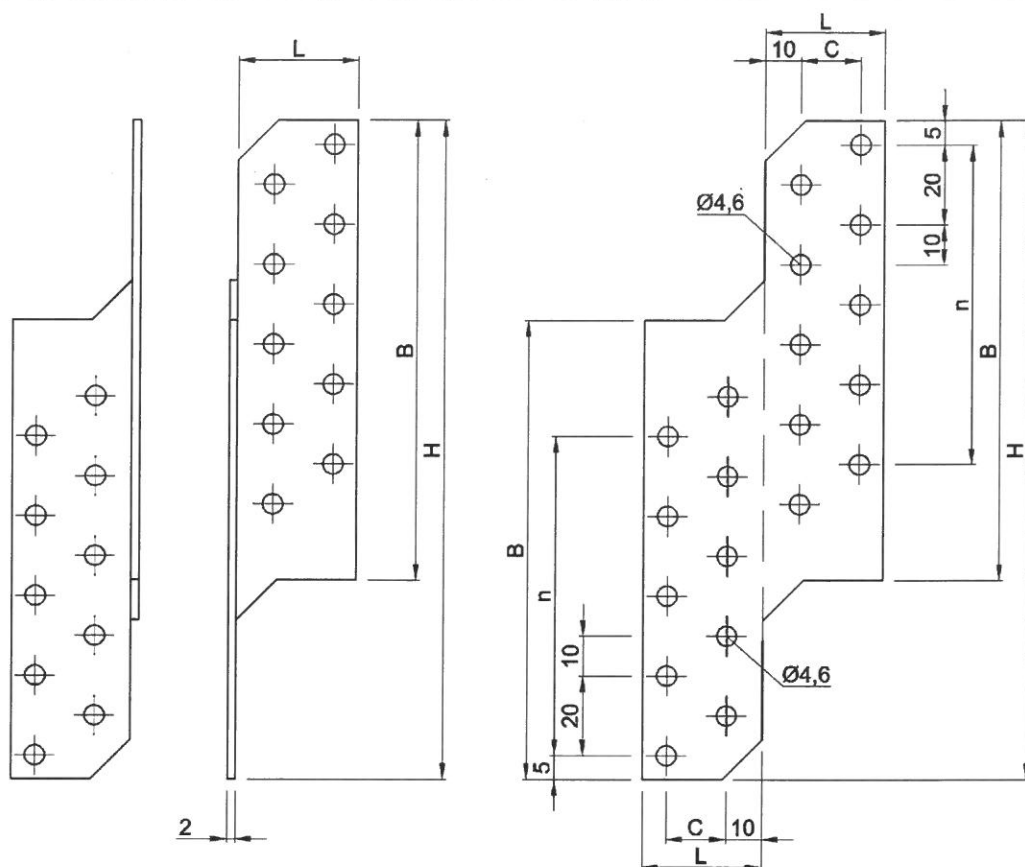


Table A17. KOELNER D-SP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions				Thickness, mm	Number of holes in row, n	Number of holes, ϕ 4,6
	H, mm	L, mm	B, mm	C, mm			
Right							
D-SP-170P	170	30	115	15	2,0	5	2 × 10
D-SP-210P	210	30	155	15		7	2 × 14
D-SP-250P	250	30	180	15		9	2 × 18
D-SP-290P	290	30	220	15		11	2 × 22
D-SP-330P	330	40	260	20		13	2 × 26
D-SP-370P	370	40	300	20		15	2 × 30
Left							
D-SP-170L	170	30	115	15	2,0	5	2 × 10
D-SP-210L	210	30	155	15		7	2 × 14
D-SP-250L	250	30	180	15		9	2 × 18
D-SP-290L	290	30	220	15		11	2 × 22
D-SP-330L	330	40	260	20		13	2 × 26
D-SP-370L	370	40	300	20		15	2 × 30

KOELNER

Three-dimensional nailing plates KOELNER D-SP

Annex A17
of European
Technical Assessment
ETA-12/0523

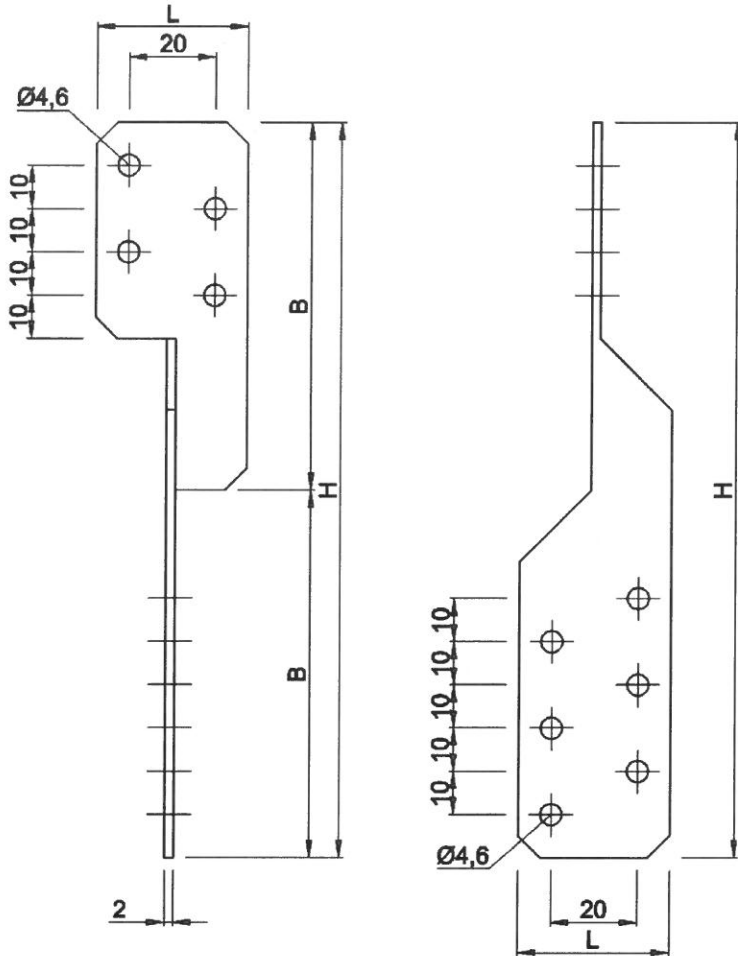


Table A18. KOELNER D-SP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions			Thickness, mm	Number of holes, ϕ 4,6
	H, mm	L, mm	B, mm		
Right					
D-SP-170	170	35	85	2,0	4 × 6
D-SP-210	210		105		4 × 8
D-SP-250	250		125		4 × 10

KOELNER	Annex A18 of European Technical Assessment ETA-12/0523
Three-dimensional nailing plates KOELNER D-SP	

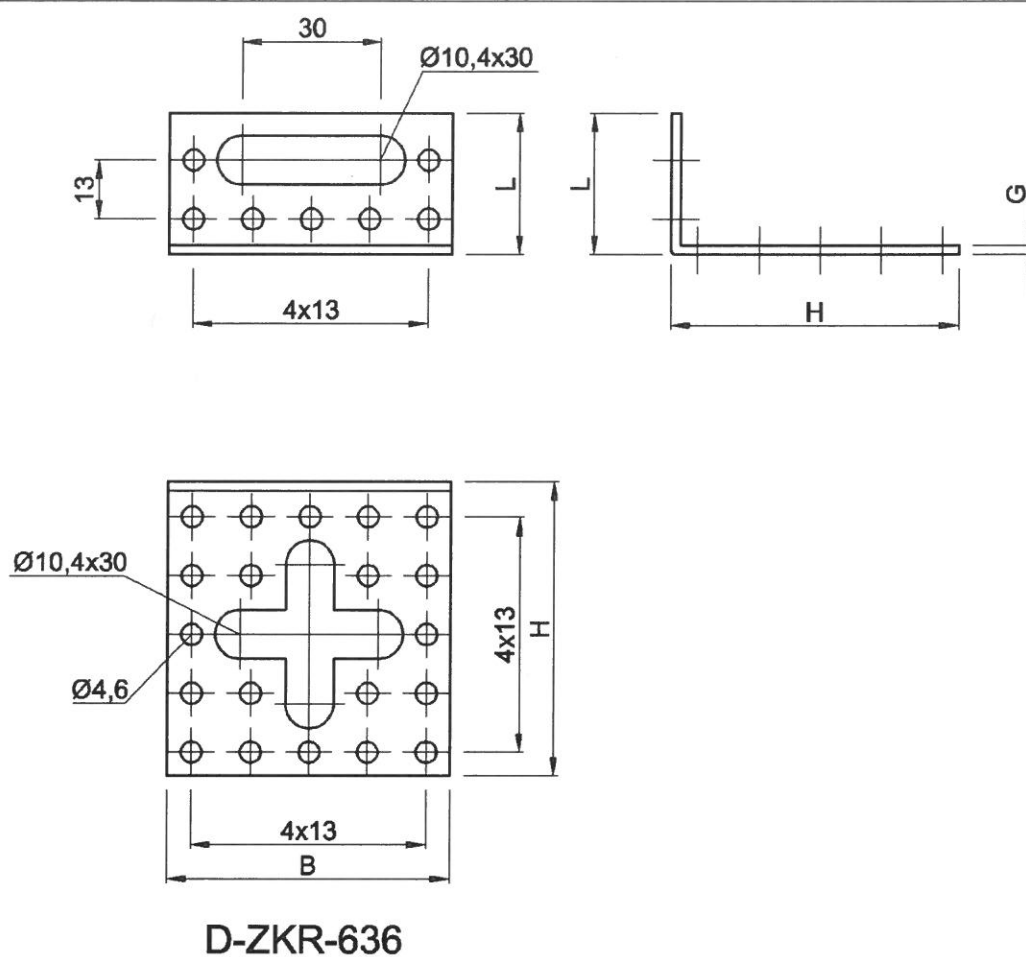






Table A19. KOELNER D-ZKR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions H × B × L, mm	Thickness, mm
D-ZKR-636	60 × 30 × 60	2,0

KOELNER

Three-dimensional nailing plates KOELNER D-ZKR

Annex A19
of European
Technical Assessment
ETA-12/0523

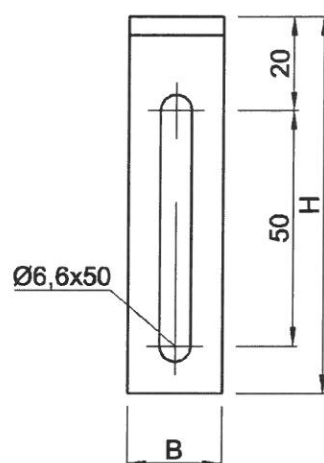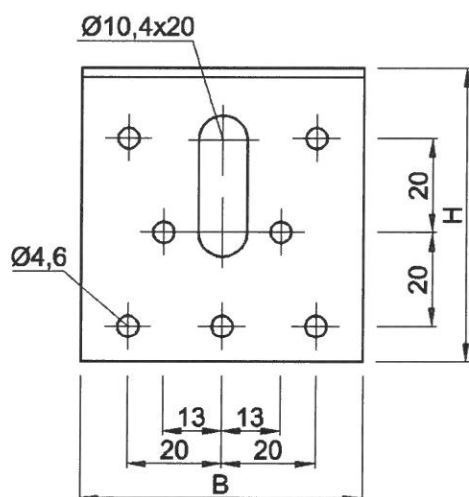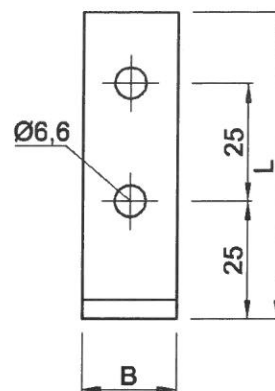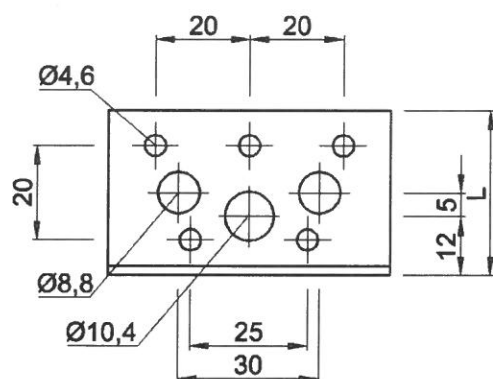

D-ZKR-646

D-ZKR-862

Table A20. KOELNER D-ZKR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions H × B × L, mm	Thickness, mm
D-ZKR-646	60 × 40 × 60	2,0
D-ZKR-862	80 × 65 × 20	

KOELNER

Three-dimensional nailing plates KOELNER D-ZKR

Annex A20
of European
Technical Assessment
ETA-12/0523

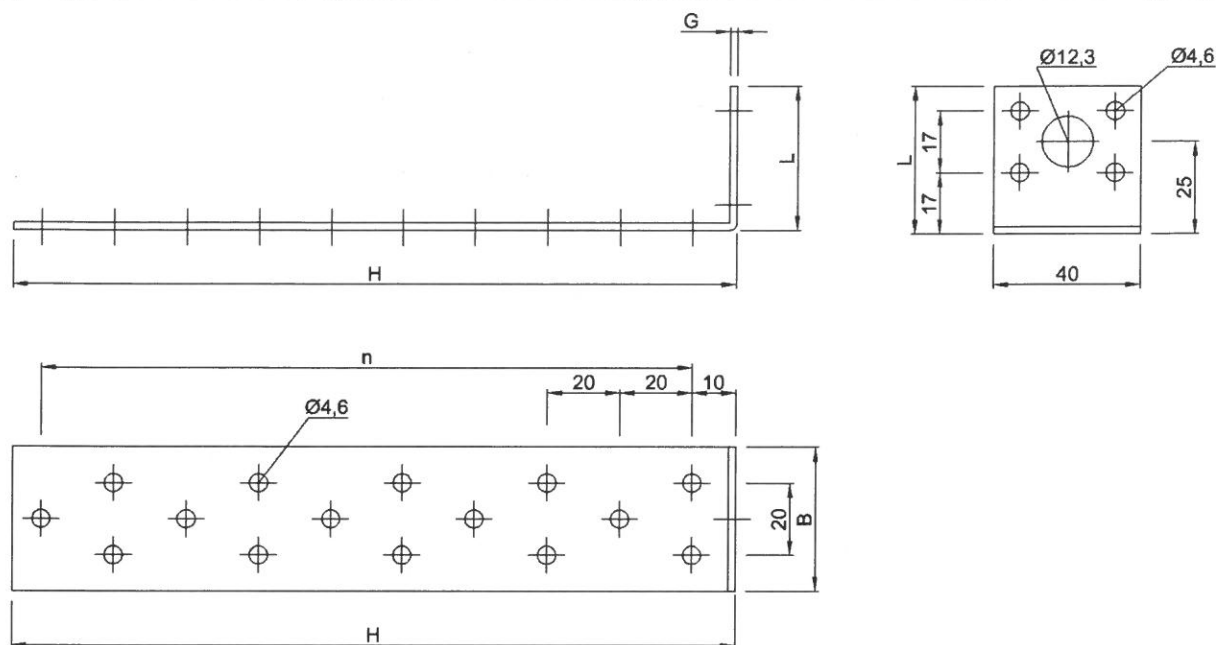



Table A21. KOELNER D-LA three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions			Thickness, mm	Number of row, n	Number of holes, ϕ 4,6	Number of holes, ϕ 12,3
	H, mm	L, mm	B, mm				
D-LA-422	200	40	40	2,0	10	15 + 4	1
D-LA-432	300				15	23 + 4	1
D-LA-442	400				20	30 + 4	1
D-LA-452	500				25	38 + 4	1
D-LA-423	200			3,0	10	15 + 4	1
D-LA-433	300				15	23 + 4	1
D-LA-443	400				20	30 + 4	1
D-LA-453	500				25	38 + 4	1


KOELNER

Three-dimensional nailing plates KOELNER D-LA


Annex A21
of European
Technical Assessment
ETA-12/0523




Static diagram No 1




Static diagram No 2



Static diagram No 3



Static diagram No 4



Static diagram No 5



Static diagram No 6

Table B1. Characteristic load-carrying capacity of joints made with KOELNER D-WB three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-WB 411	full nailing	9,45
D-WB 510		
D-WB 516		17,20
D-WB 610		16,09
D-WB 613		12,78
D-WB 712		
D-WB 812		17,56
D-WB 815		
D-WB 818		21,94
D-WB 914		26,95
D-WB 1014		
D-WB 1020		35,50

* Ring shank nails with the diameter d ≥ 4 mm and the length ≥ 40 mm.
Timber grade at least C24 according to EN 338

** Loading according to static diagram No 1

KOELNER

Characteristic load-carrying capacity of joints made with KOELNER D-WB three-dimensional nailing plates

Annex B1
of European
Technical Assessment
ETA-12/0523

Table B2.1. Characteristic load-carrying capacity of joints made with KOELNER D-WD three-dimensional nailing plates

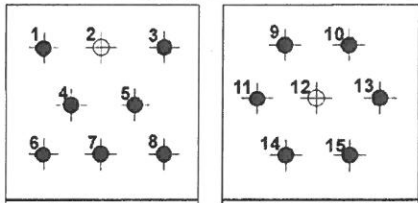
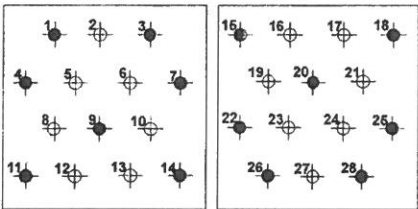

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-WD 310	full nailing	17,50
D-WD 312		20,06
D-WD 315		
* Ring shank nails with the diameter d ≥ 4 mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338		
** Loading according to static diagram No 1		

Table B2.2. Characteristic load-carrying capacity of joints made with KOELNER D-WC three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-WC 411	full nailing	6,20
D-WC 510		12,38
D-WC 610		
D-WC 712		13,66
D-WC 812		16,34
D-WC 815		
D-WC 818		33.23
D-WC 914		14,3
D-WC 1014	18,14	
* Ring shank nails with the diameter d ≥ 4 mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338		
** Loading according to static diagram No 2		

KOELNER**Characteristic load-carrying capacity of joints made with
KOELNER D-WD and D-WC three-dimensional nailing plates****Annex B2**
of European
Technical Assessment
ETA-12/0523

Table B3. Characteristic load-carrying capacity of joints made with KOELNER D-KF and D-KP three-dimensional nailing plates


Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-KP 444	full nailing	3,58
D-KF 446/D-KP 448		
D-KF 448/D-KP 448		
D-KF 4410/D-KP 4410		
D-KF 4415/D-KP 4415		
D-KF 666/D-KP 666 D-KF 664/D-KP 664 D-KF 665/D-KP 665		3,49
D-KF 668/D-KP 668 D-KP 6610	full nailing	20,79
D-KF 888/D-KP 888 D-KF 884/ D-KP 884 D-KF 886/ D-KP 886 D-KP 8810 D-KP 8812		13,30
D-KF 114/ D-KP 114 D-KF 116/ D-KP 116 D-KF 118/ D-KP 118 D-KF 1110/ D-KP 1110 D-KF 1112/ D-KP 1112 D-KF 1114/ D-KP 1114		6,16
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

KOELNER

**Characteristic load-carrying capacity of joints made with
KOELNER D-KF and D-KP three-dimensional nailing plates**

Annex B3
of European
Technical Assessment
ETA-12/0523

Table B4. Characteristic load-carrying capacity of joints made with KOELNER D-ZK three-dimensional nailing plates

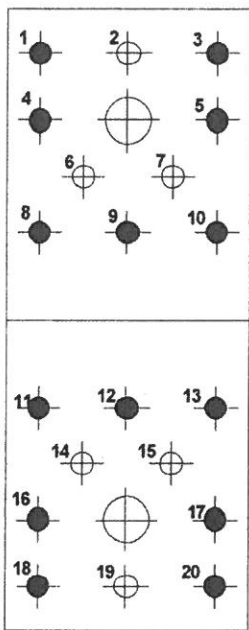
Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-ZK 533	full nailing	9,68
D-ZK 60		
D-ZK 70 D-ZK 90 D-ZK 994 D-ZK 105 D-ZK 70 WZ D-ZK 90 WZ D-ZK 105 WZ D-ZK-140 WZ D-ZK-145 WZ D-ZK-1719 WZ		13,20
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

KOELNER

**Characteristic load-carrying capacity of joints made with
KOELNER D-ZK three-dimensional nailing plates**

Annex B4
of European
Technical Assessment
ETA-12/0523

Table B5. Characteristic load-carrying capacity of joints made with KOELNER D-ZN three-dimensional nailing plates

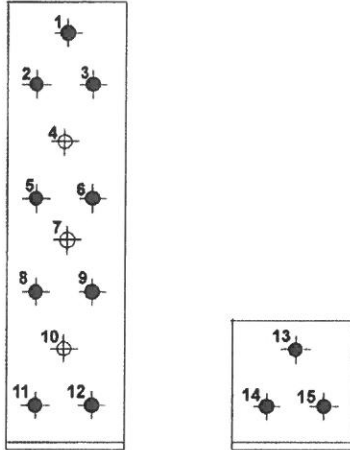Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R_k , kN
D-ZN 4164 D-ZN 4124		11,69
D-ZN 6356 D-ZN 4904 D-ZN 5905 D-ZN 6906 D-ZN 8604 D-ZN 9124	full nailing	3,44
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

KOELNER

**Characteristic load-carrying capacity of joints made with
KOELNER D-ZN three-dimensional nailing plates**

Annex B5
of European
Technical Assessment
ETA-12/0523

Table B6.1. Characteristic load-carrying capacity of joints made with KOELNER D-KB three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-KB 1050	full nailing	19,89
D-KB 1075		6,43
D-KB 1280		17,22
D-KB 1812		
* Ring shank nails with the diameter d ≥ 4 mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

Table B6.2. Characteristic load-carrying capacity of joints made with KOELNER D-MI three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-MI 6620	full nailing	2,01
D-MI 2215		
D-MI 3315		
D-MI 4415		
D-MI 5515		
D-MI 8820		4,06
D-MI 1120		
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

KOELNER
**Characteristic load-carrying capacity of joints made with
 KOELNER D-KB and D-MI three-dimensional nailing plates**
Annex B6
 of European
 Technical Assessment
 ETA-12/0523

Table B7.1. Characteristic load-carrying capacity of joints made with KOELNER D-MK three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-MK 125 D-MK 085 D-MK 105	full nailing	8,31
D-MK 145 D-MK 165 D-MK 185		3,94
* Ring shank nails with the diameter d ≥ 4 mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

Table B7.2. Characteristic load-carrying capacity of joints made with KOELNER D-ZU three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-ZU 3325 D-ZU 4425 D-ZU 5525 D-ZU 5530 D-ZU 6625 D-ZU 5730	full nailing	3,08
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

KOELNER

**Characteristic load-carrying capacity of joints made with
KOELNER D-MK and D-ZU three-dimensional nailing plates**

Annex B7
of European
Technical Assessment
ETA-12/0523

Table B8.1. Characteristic load-carrying capacity of joints made with KOELNER D-TB three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-TB 81 D-TB 71 D-TB 91 D-TB 101 D-TB 121 D-TD 5175 D-TD 7160 D-TD 7175 D-TD 7190 D-TD 9160 D-TD 9175 D-TD 9190 D-TD 1075 D-TD 1090 D-TD 1290	full nailing	5,14
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 4		

Table B8.2. Characteristic load-carrying capacity of joints made with KOELNER D-TG three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-TG 916 D-TG 716 D-TG 816 D-TG 1016 D-TG 1116 D-TG 1216	full nailing	8,42
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 4		

KOELNER
**Characteristic load-carrying capacity of joints made with
 KOELNER D-TB and D-TG three-dimensional nailing plates**
Annex B8
 of European
 Technical Assessment
 ETA-12/0523

Table B9. Characteristic load-carrying capacity of joints made with KOELNER D-TC three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R_k , kN
D-TC 1016 D-TC 716 D-TC 816 D-TC 916 D-TC 1116 D-TC 1216 D-TC 1416 D-TC 1616	full nailing	5,24
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 4		

KOELNER

**Characteristic load-carrying capacity of joints made with
KOELNER D-TC three-dimensional nailing plates**

Annex B9
of European
Technical Assessment
ETA-12/0523

Table B10.1. Characteristic load-carrying capacity of joints made with KOELNER D-SP three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-SP 170L D-SP 170P D-SP 210L/D-SP 210 P D-SP 250L/D-SP 250P D-SP 290L/D-SP 290P D-SP 330L/D-SP 330P D-SP 370L/D-SP 370P	full nailing	20,85
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 5		

Table B10.2. Characteristic load-carrying capacity of joints made with KOELNER D-SP three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R _k , kN
D-SP 170 D-SP 210 D-SP 250	full nailing	18,92
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 6		

KOELNER


**Characteristic load-carrying capacity of joints made with
KOELNER D-SP three-dimensional nailing plates**

Annex B10
of European
Technical Assessment
ETA-12/0523

Table B11.1. Characteristic load-carrying capacity of joints made with KOELNER D-ZKR three-dimensional nailing plates

Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R_k , kN
D-ZKR 646 D-ZKR 636 D-ZKR 862	full nailing	3,24
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

Table B11.2. Characteristic load-carrying capacity of joints made with KOELNER D-LA three-dimensional nailing plates

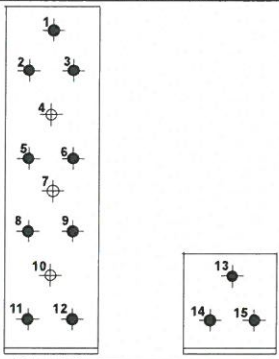Symbol	Nailing reference drawing *	Characteristic load-carrying capacity **, R_k , kN
D-LA 422 D-LA 432 D-LA 442 D-LA 452 D-LA 423 D-LA 433 D-LA 443 D-LA 453		13,97
* Ring shank nails with the diameter $d \geq 4$ mm and the length ≥ 40 mm. Timber grade at least C24 according to EN 338 ** Loading according to static diagram No 3		

KOELNER
**Characteristic load-carrying capacity of joints made with
 KOELNER D-ZKR and D-LA three-dimensional nailing plates**
Annex B11
 of European
 Technical Assessment
 ETA-12/0523